


更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

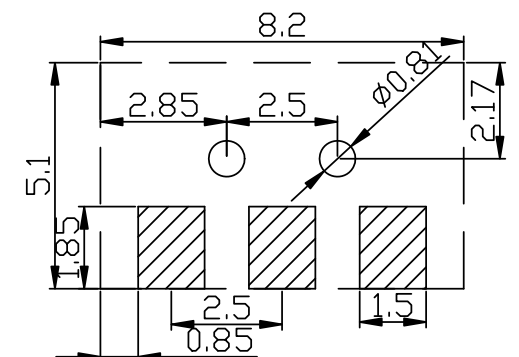

P.C.B. LAYOUT (TOP VIEW)

SPECIFICATIONS:

- 1.Contact Current Rating:2 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.

6. Material:

Contact: Beryllium Copper Alloy, selective 30u" gold
 plating on contact area matt tin on solder area.
 Cover Housing: LCP.
 Bottom Housing: LCP.

DIMENSION IN mm [Inch]			 康茂股份有限公司 KOMMA ELECTRONIC INC.		
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 Battery Connector Pitch 2.5mm 3Pin Height 2.45mm		CUSTOMER DRAWING
.X±0.3	.X*± 1°	審核 APPROVE	案號 FILE NO.	圖號 DWG NO.	
.XX±0.20	.X*± 0.5°	核對 CHECK	BCS2.5-2103	BCS2.5-2103	
.XXX±0.100	.XX*± 0.25°	製圖 DRAW	圖紙 SIZE	角法 PROJ. 	張數 1 / 1 更改 REV. A