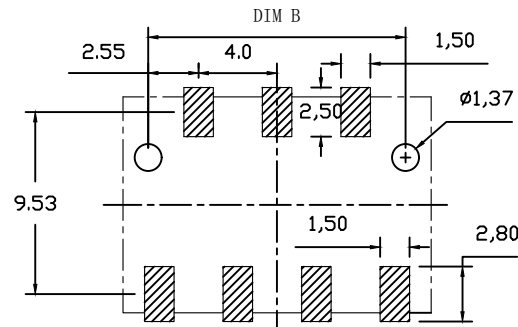
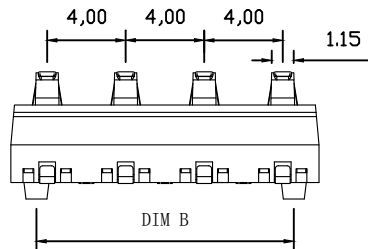
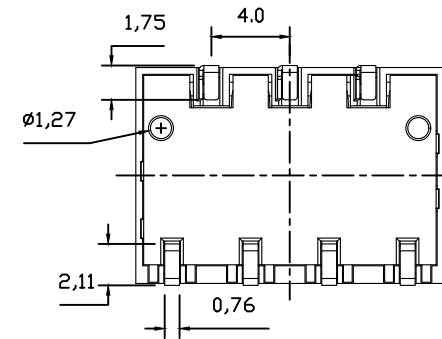
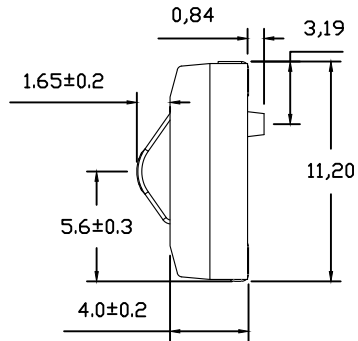
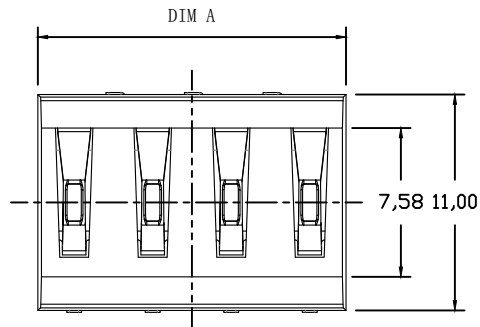


Note:

1.Material:

1.1 Housing: High temperature thermoplastic UL94v-0

1.2 Contact: Phosphor Bronze

2.Finish:

2.1 CONTACT: Gold selective 5u" plated on contact area;

3.Specification:

3.1 Current rating: 3A Max.

3.2 Dielectric withstanding voltage: 500 V(ac) r.m.s.

3.3 Contact resistance: 30mΩ Max.

3.4 Insulation resistance: 500MΩ Min.

3.5 Operating Temperature: -55°C~125°C

Pin	PART NO.	DIM A	DIM B
2P	BCS4.0-1102-G5	7.7	5.11
3P	BCS4.0-1103-G5	11.7	9.11
4P	BCS4.0-1104-G5	15.7	13.11
5P	BCS4.0-1105-G5	19.7	17.11
6P	BCS4.0-1106-G5	23.7	21.11

REV.	DATE	TOLERANCE	
2017050522	2017.05.05	X. ±0.15	X. °
		X. X ±0	X(X)° ±0.5°
DRAWN	KevinMao	X.XX ±0.05	X.XX ±0.05°
DESIGNED	KevinMao	X.XXX ±0.005	X.XXX ±0.005°
CHECKED	EricPeng	PROJECTION	
APPROVED		SCALE:	

康茂股份有限公司
COMMA ELECTRONIC INC.

ARTICLE:

Battery connector

MODEL:

BCS4.0-1104

A4

UNIT: mm

SHEET: 1/1