


更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

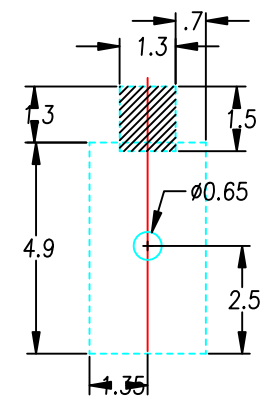

PCB LAYOUT

SPECIFICATIONS:

- 1.Contact Current Rating:2.4 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.
- 6.Material:
Contact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C	 康茂股份有限公司 COMMA ELECTRONIC INC.				
TOLERANCE UNLESS OTHERWISE SPECIFIED					名稱 TITLE	Battery Connector Pitch 2.2mm 1Pin Height 2.1mm	CUSTOMER DRAWING	
.X±0.3	X.*± 1*	審核 APPROVE	案 號 FILE NO.	圖 號 DWG NO.	BCS2.2-1101			
.XX±0.20	.X*± 0.5*	核 對 CHECK						
.XXX±0.100	.XX*± 0.25*	製 圖 DRAW	圖 紙 SIZE	A4	角 法 PROJ. 	張 數 SHEET 1 / 1		
					比例 SCALE	1:1	更改 REV	A