



F
E
D
C
B
A

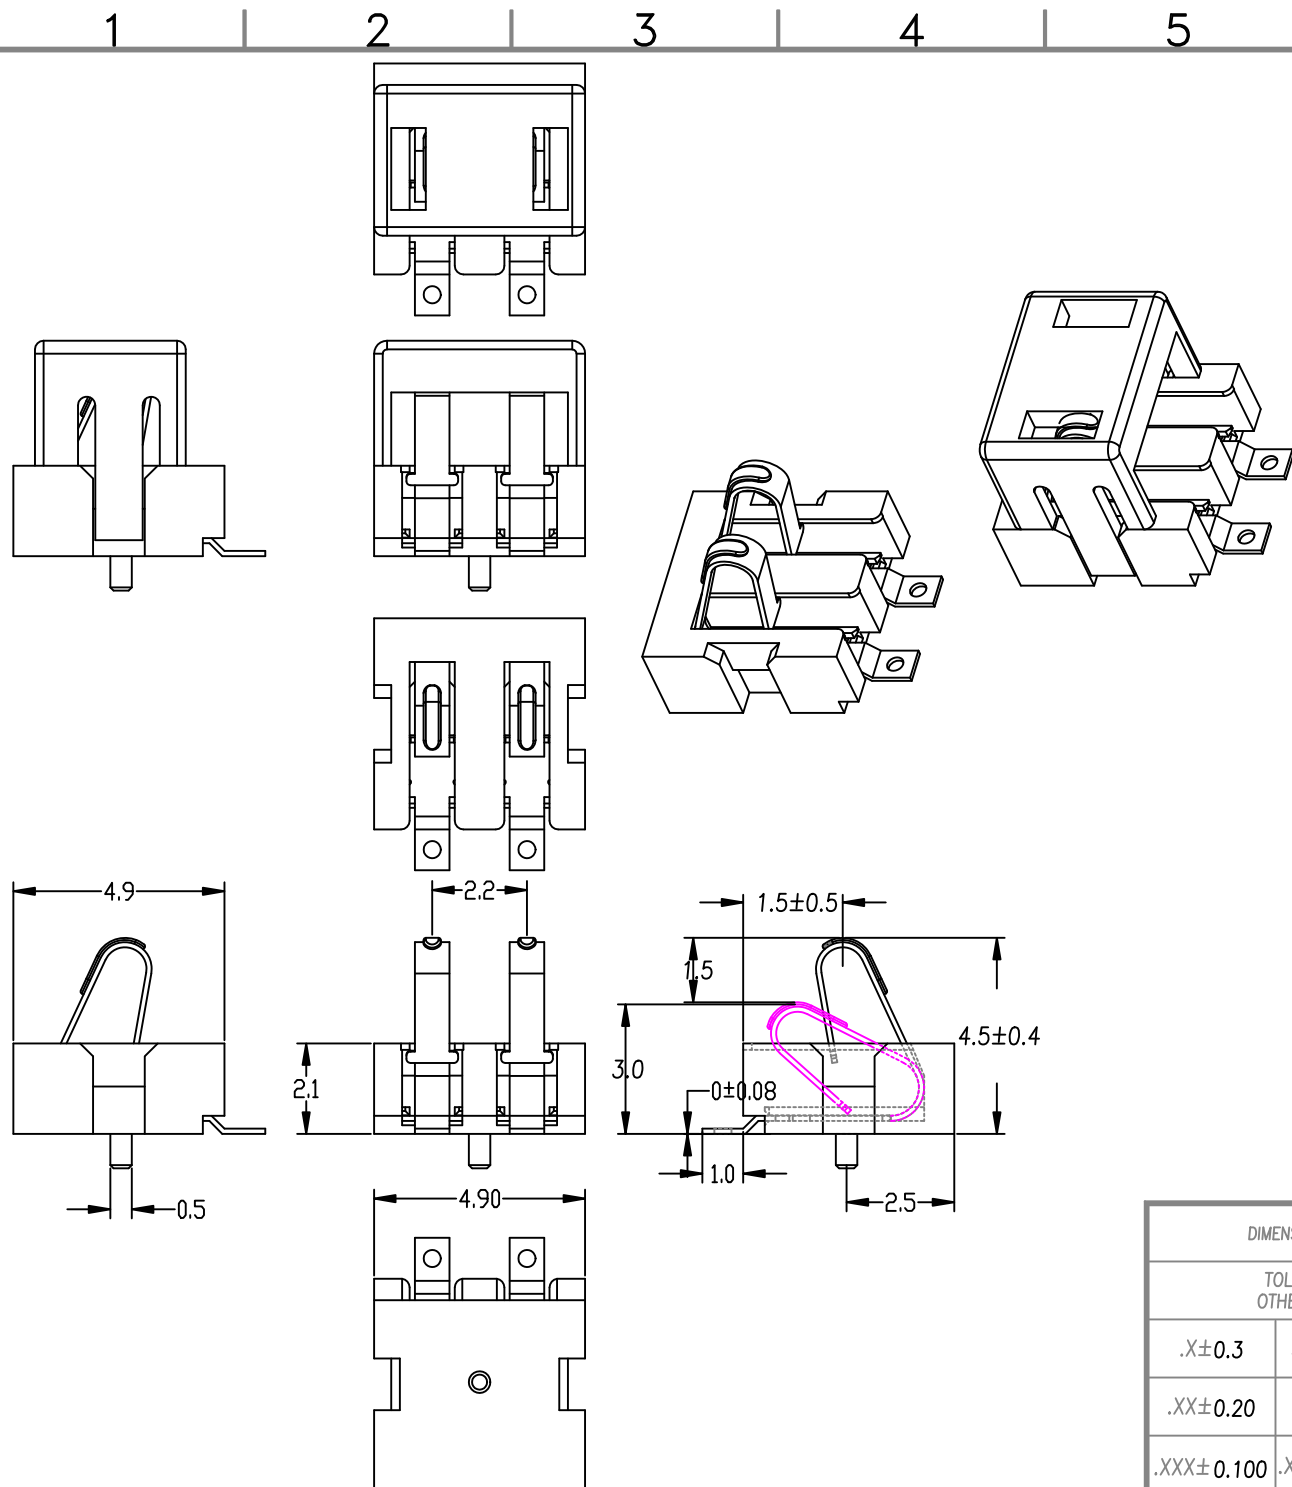

更改 REV	改變內容 MODIFICATION	日期 DATE	修改 DRAW

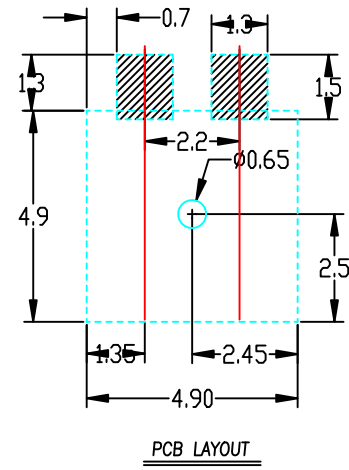

SPECIFICATIONS:

- 1.Contact Current Rating:2.4 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.
- 6.Material:
Contact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C	
TOLERANCE UNLESS OTHERWISE SPECIFIED			 康茂股份有限公司 COMMA ELECTRONIC INC.	
			名稱 TITLE	
			Battery Connector Pitch 2.2mm 2Pin Height 2.1mm	
			CUSTOMER DRAWING	
			案 號 FILE NO.	
			BCS2.2-1102	
			圖 號 DWG NO.	
			BCS2.2-1102	
			角法 PROJ.	
				
			張數 SHEET	
			1 / 1	
			圖紙 SIZE	
			A4	
			比例 SCALE	
			1:1	
			更改 REV	
			A	