
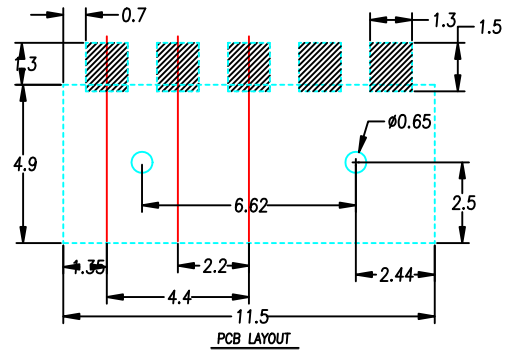
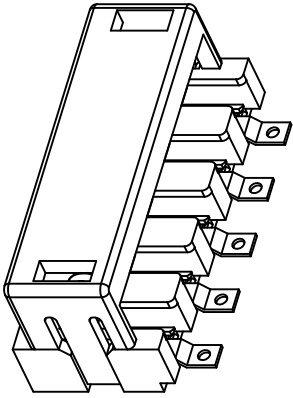
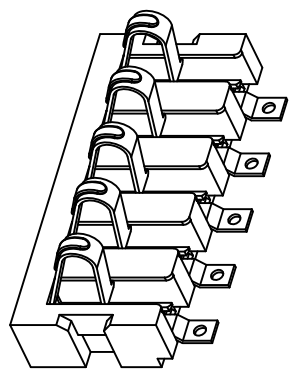
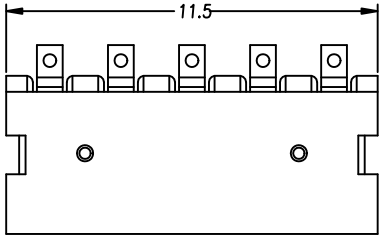
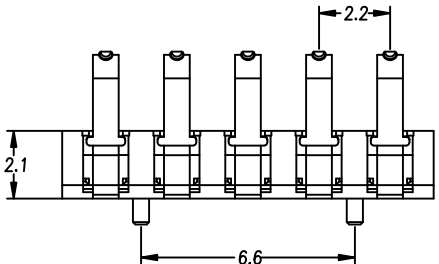

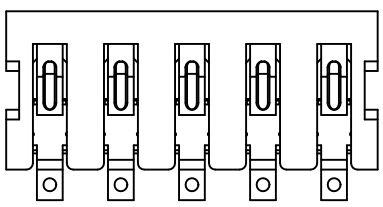
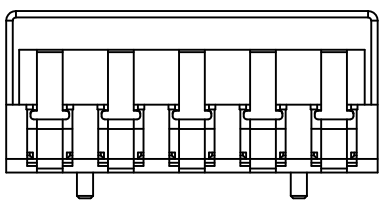



1 2 3 4 5 6 7 8

更改 REV	改變內容 MODIFICATION	日期 DATE	修改 DRAW

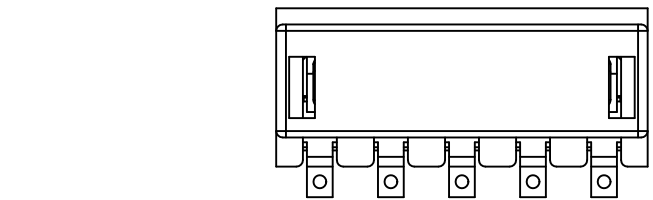

SPECIFICATIONS:

- 1.Contact Current Rating:2.4 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.
- 6.Material:
Ccontact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C 康茂股份有限公司 COMMA ELECTRONIC INC.	
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE	CUSTOMER DRAWING
.X±0.3	X*± 1°	審核 APPROVE	Battery Connector Pitch 2.2mm 5Pin Height 2.1mm	
.XX±0.20	.X*± 0.5°	核對 CHECK	案號 FILE NO.	圖號 DWG NO.
.XXX±0.100	.XX*± 0.25°	製圖 DRAW	BCS2.2-1105	BCS2.2-1105
圖紙 SIZE		角法 PROJ.	圖號 SCALE	張數 SHEET
A4		1:1	1	1
		比例 SCALE	更改 REV	A

1 2 3 4 5 6 7 8