


更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

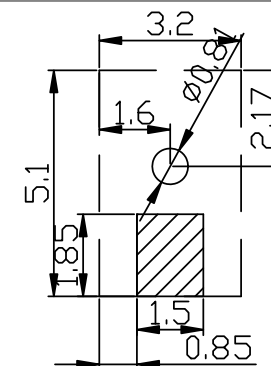

P.C.B. LAYOUT (TOP VIEW)

SPECIFICATIONS:

- 1.Contact Current Rating:2 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.

6.Material: Ccontact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C	 康茂股份有限公司 COMMA ELECTRONIC INC.	
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X±0.3	X*± 1*	審 核 APPROVE	名稱 TITLE	Battery Connector Pitch 2.5mm 1Pin Height 2.45mm	CUSTOMER DRAWING
.XX±0.20	.X*± 0.5*	核 對 CHECK			
.XXX±0.100	.X*± 0.25*	製 圖 DRAW	案 號 FILE NO.	圖 號 DWG NO.	
			BCS2.5-2101		
			圖 紙 SIZE	角法 PROJ.	
				1:1	1 / 1
				更改 REV	A

DIMENSION IN mm [Inch]		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
$\text{.X} \pm 0.3$	$\text{X}^* \pm 1^*$	審核 APPROVE
$\text{.XX} \pm 0.20$	$\text{X}^* \pm 0.5^*$	核對 CHECK
$\text{.XXX} \pm 0.100$	$\text{X}^* \pm 0.25^*$	製圖 DRAW