


更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

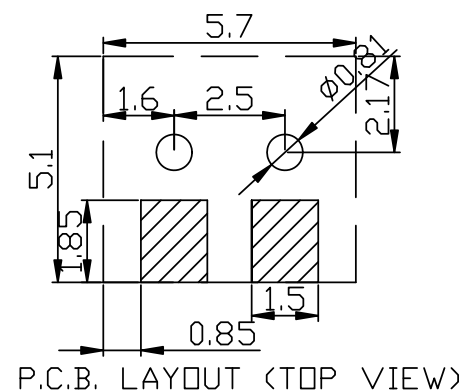

SPECIFICATIONS:

- 1.Contact Current Rating:2 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.

6. Material: Contact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C  康茂股份有限公司 COMMA ELECTRONIC INC.		
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 Battery Connector Pitch 2.5mm TITLE 2Pin Height 2.45mm		CUSTOMER DRAWING
± 0.3	$\pm 1^{\circ}$	審核 APPROVE	案號 FILE NO.	圖號 DWG NO.	
± 0.20	$\pm 0.5^{\circ}$	核對 CHECK	BCS2.5-2102	BCS2.5-2102	
± 0.100	$\pm 0.25^{\circ}$	製圖 DRAW	圖紙 SIZE	角法 PROJ. 	張數 1 / 1 SHEET 更改 REV A