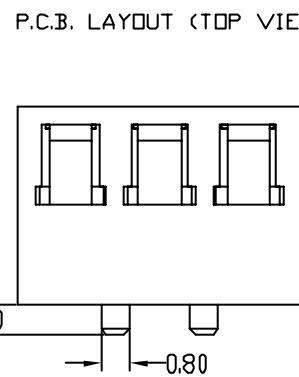
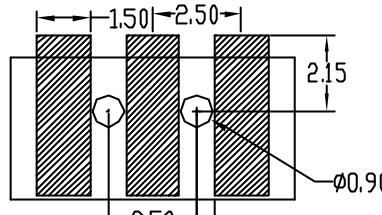

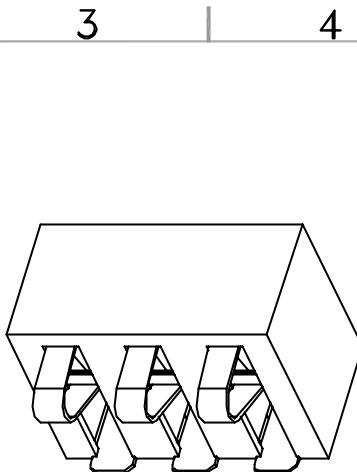

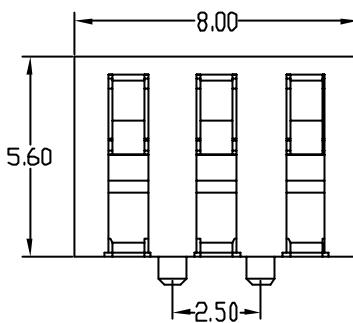
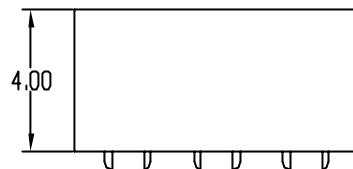


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

F

更改  
REV設變內容  
MODIFICATION日期  
DATE修改  
DRAW

**SPECIFICATION**  
 Insulator: LCP(Black)  
 Contact: Beryllium Copper  
 Plating: Selected 30? gold over nickel

**STANDARD DATA**  
 Rating current: 1.0A  
 Operating temperature: -30? ~ +70?  
 Storage temperature: -40? ~ +85?

**ELECTRICAL**  
 Insulator resistance: 1000M ohms Min. @ 250 VDC  
 Withstanding voltage: 250VAC / minute  
 Contact resistance: 50 m ohms Max.

DIMENSION IN mm [inch]			C 名稱 TITLE	C 圖號 DWG NO.	C CUSTOMER DRAWING
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X±0.3	X.± 1°	審核 APPROVE			
.XX±0.20	X.± 0.5°	核對 CHECK			
.XXX±0.100	X.X± 0.25°	製圖 DRAW			
<b>SIZE</b> A4	角法 PROJ.	張數 SHEET	1/1	更改 REV	XB
	比例 SCALE				

康茂股份有限公司  
COMMA ELECTRONIC INC.

案號  
FILE NO.  
BCS2.50-3103

圖紙  
SIZE  
A4

C

7

8

1 2 3 4 5 6 7 8

A

A

F

E

D

C

B