



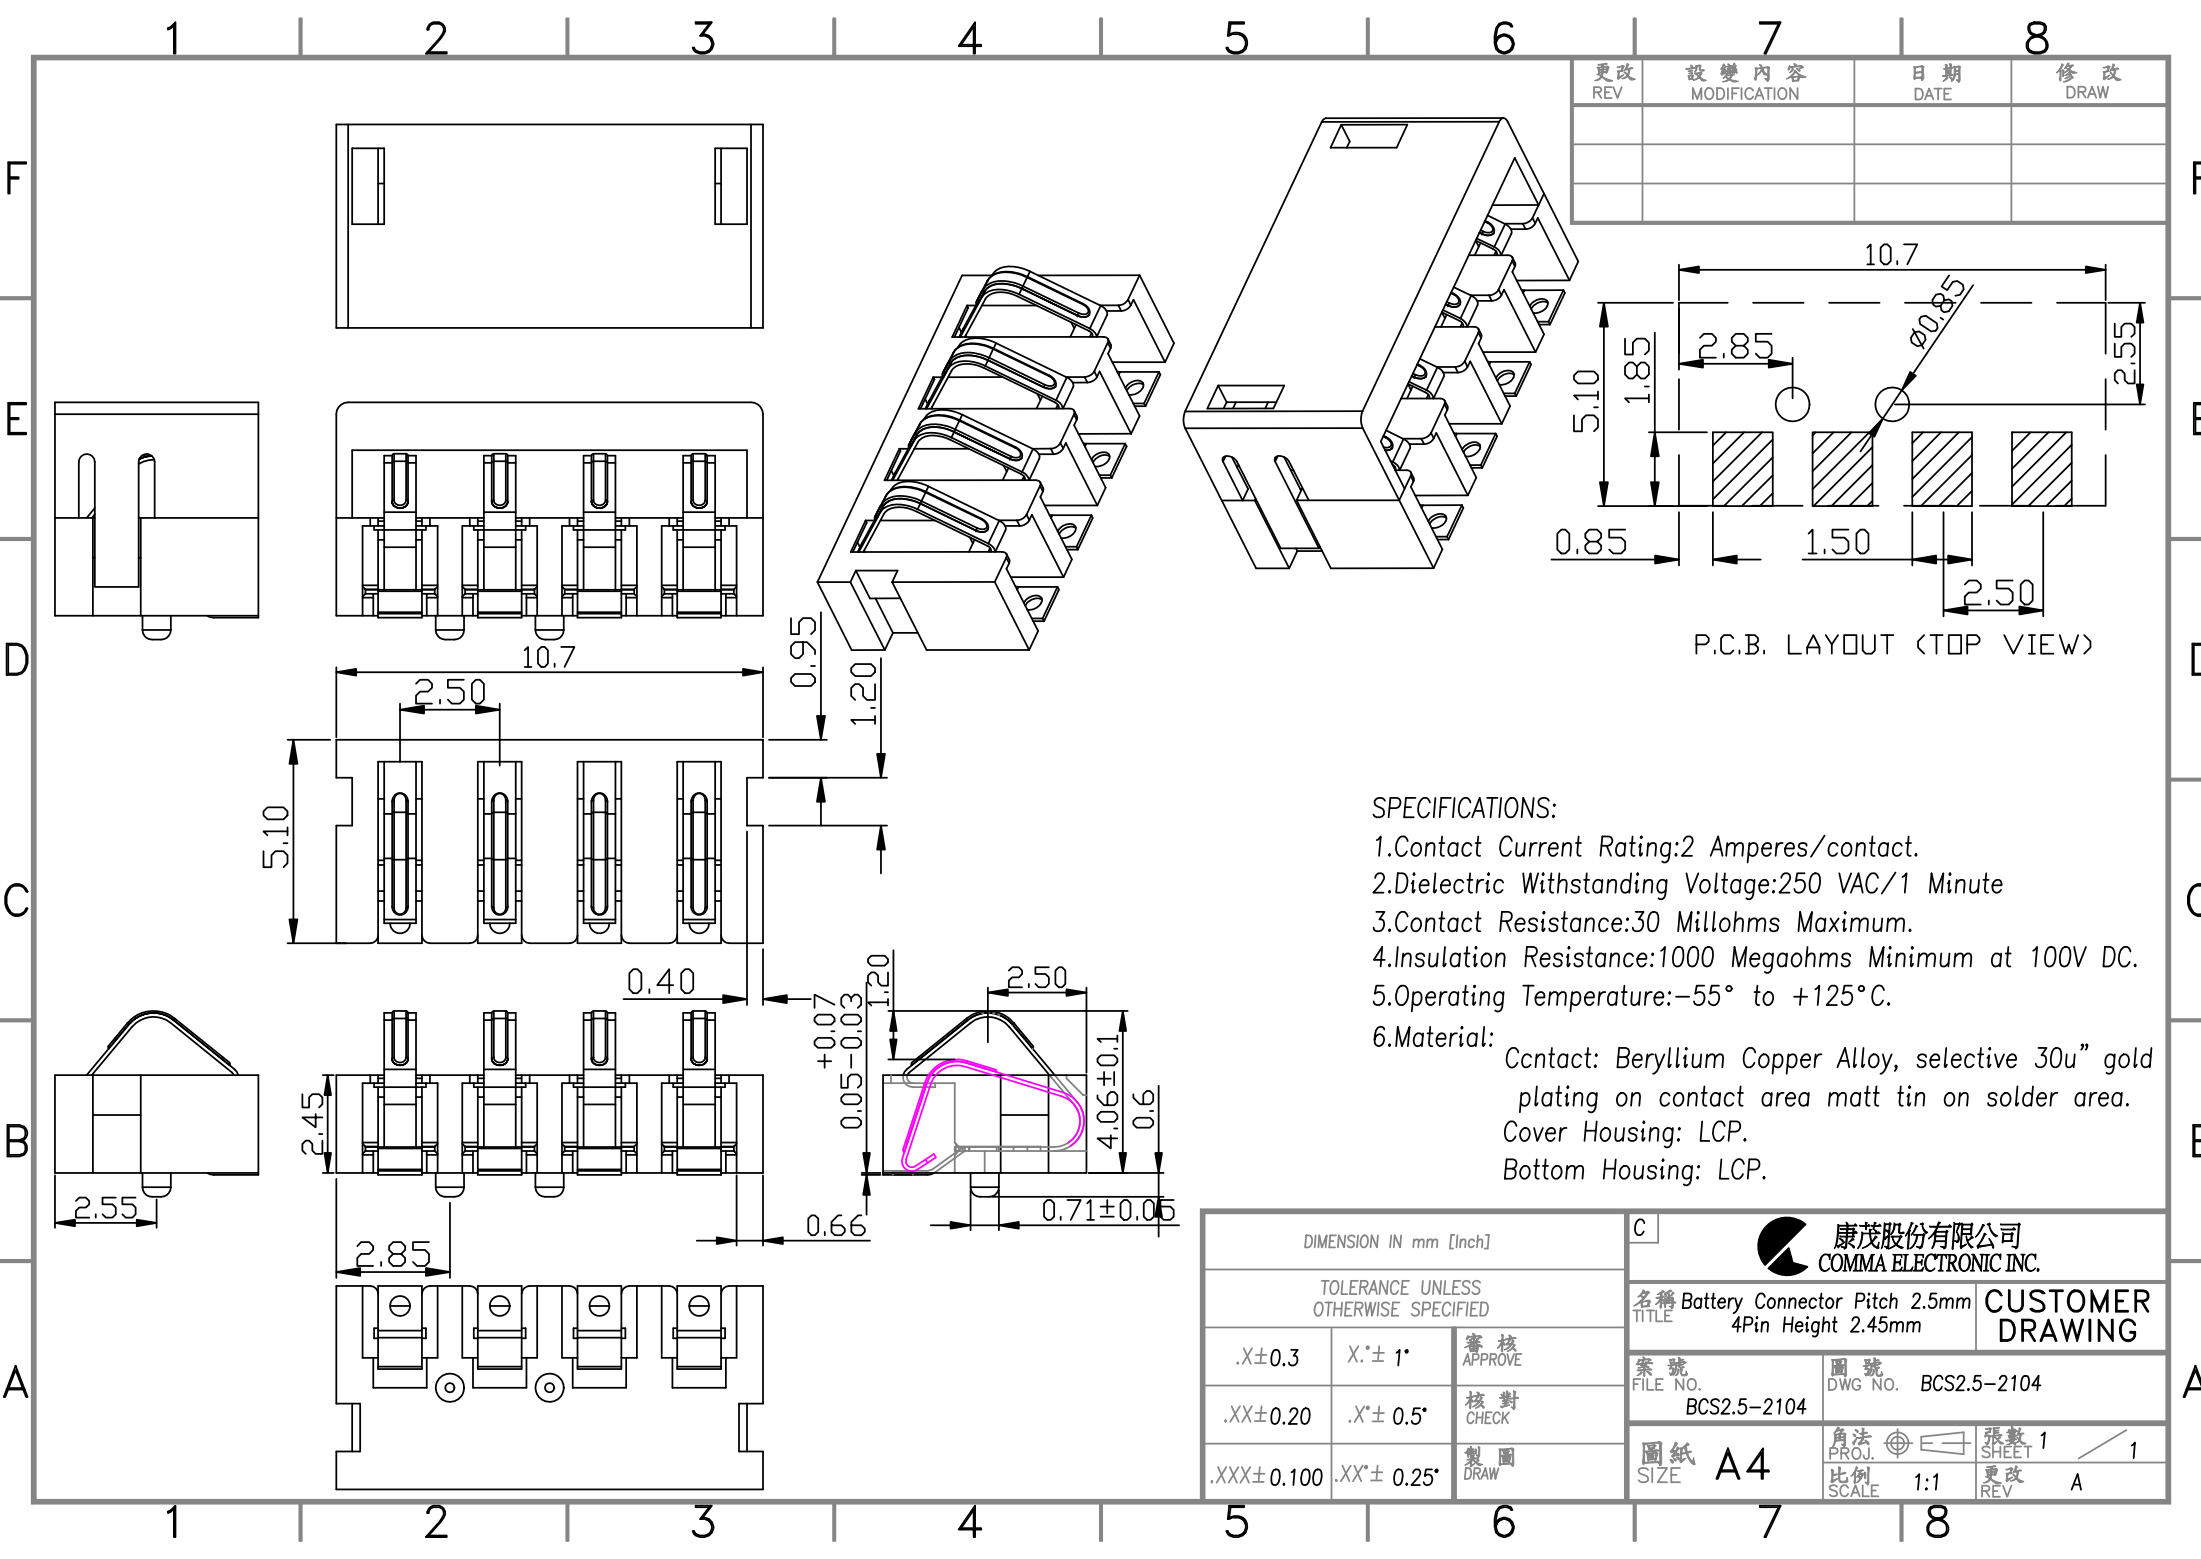

更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

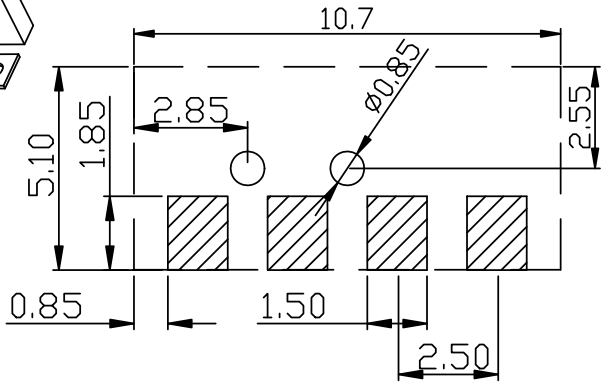

P.C.B. LAYOUT (TOP VIEW)

- SPECIFICATIONS:
- 1.Contact Current Rating:2 Amperes/contact.
 - 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
 - 3.Contact Resistance:30 Milliohms Maximum.
 - 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
 - 5.Operating Temperature:-55° to +125°C.
 - 6.Material:
Contact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C	
TOLERANCE UNLESS OTHERWISE SPECIFIED			康茂股份有限公司 COMMA ELECTRONIC INC.	
			名稱 TITLE	Battery Connector Pitch 2.5mm 4Pin Height 2.45mm
			圖號 DWG NO.	BCS2.5-2104
			圖紙 SIZE	A4
			角法 PROJ.	1:1
			比例 SCALE	1:1
			張數 SHEET	1
			更改 REV	A