


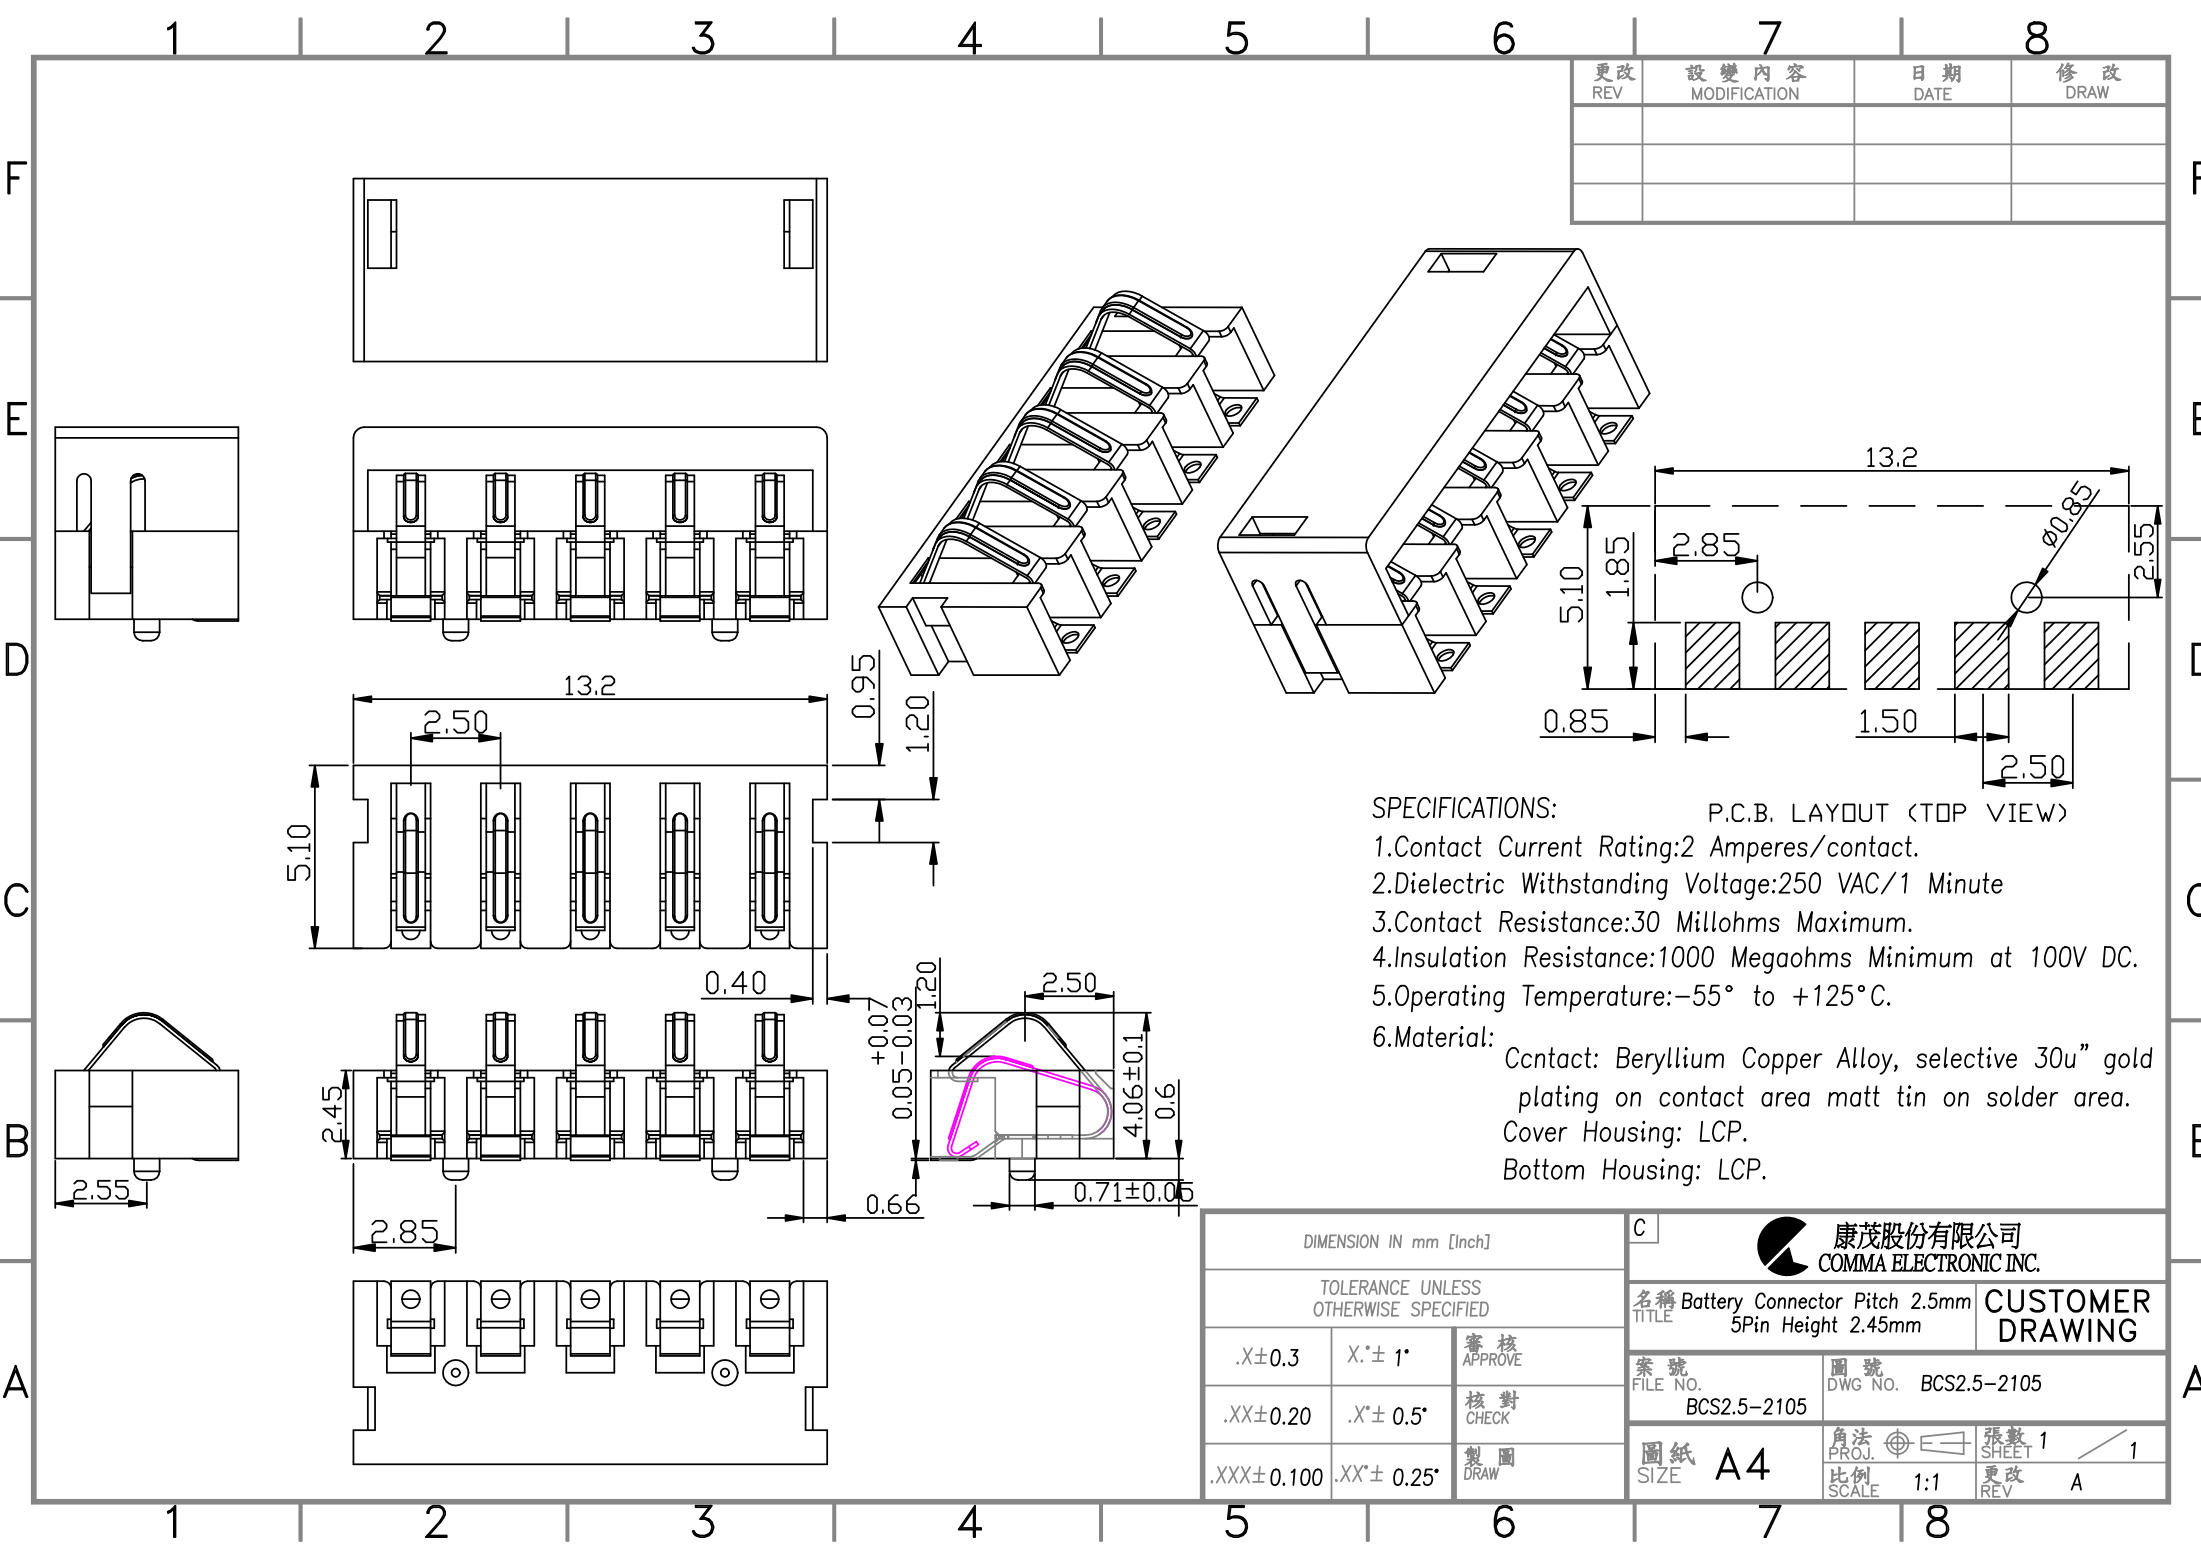

更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

SPECIFICATIONS:

P.C.B. LAYOUT (TOP VIEW)

1.Contact Current Rating:2 Amperes/contact.
2.Dielectric Withstanding Voltage:250 VAC/1 Minute
3.Contact Resistance:30 Millohms Maximum.
4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
5.Operating Temperature:-55° to +125°C.
6.Material: Contact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C 康茂股份有限公司 COMMA ELECTRONIC INC.	
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE	Battery Connector Pitch 2.5mm 5Pin Height 2.45mm
.X±0.3	X*± 1°	審 核 APPROVE	案 號 FILE NO.	CUSTOMER DRAWING
.XX±0.20	.X*± 0.5°	核 對 CHECK	圖 號 DWG NO.	BCS2.5-2105
.XXX±0.100	.XX*± 0.25°	製 圖 DRAW	圖 紙 SIZE	A4
			角 法 PROJ.	1:1
			比 例 SCALE	1:1
			張 數 SHEET	1 / 1
			更 改 REV	A