
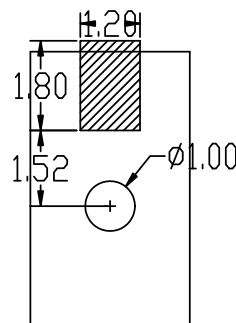

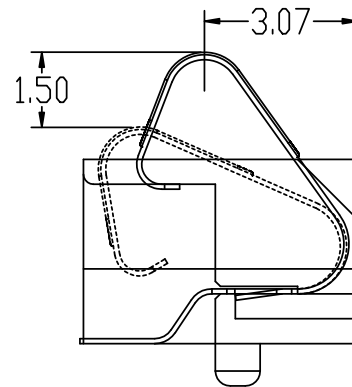
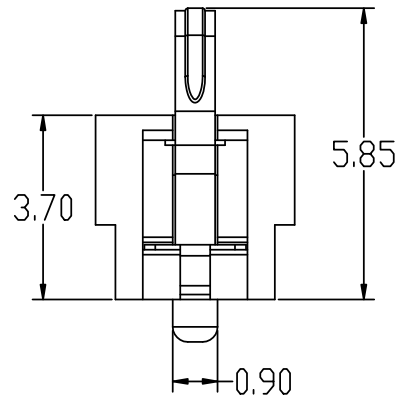



更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

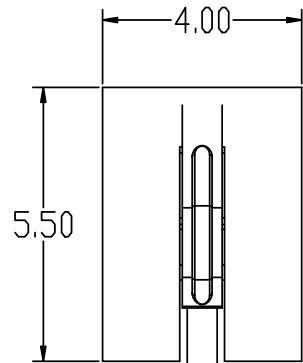

1PIN P.C.B. LAYOUT (TOP VIEW)

SPECIFICATION

Insulator : LCP(Black)
Contact : Beryllium Copper
Plating : Selected gold over nickel

STANDARD DATA

Rating current : 1.0A
Operating temperature : -30°C ~ +70°C
Storage temperature : -40°C ~ +85°C

ELECTRICAL

Insulator resistance : 1000M ohms Min. @ 250 VDC
Withstanding voltage : 250VAC / minute
Contact resistance : 50 m ohms Max.

DIMENSION IN mm [Inch]			C 康茂股份有限公司 COMMA ELECTRONIC INC.	
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE	CUSTOMER DRAWING
.X±0.3	X*±1*	審 核 APPROVE	案 號 FILE NO. BCS3.0	圖 號 DWG NO. BCS3.0-1101
.XX±0.20	.X*±0.5*	核 對 CHECK	圖 紙 SIZE A4	角 法 PROJ. 1:1
.XXX±0.100	.XX*±0.25*	製 圖 DRAW	日 期 DATE 12/22/04	更 改 REV XA