



1 2 3 4 5 6 7 8

F



更改 REV	設變內容 MODIFICATION	日期 DATE	修改 DRAW



F

E

E



D

D

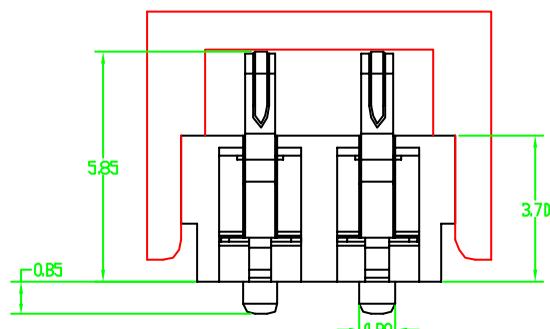

C

C

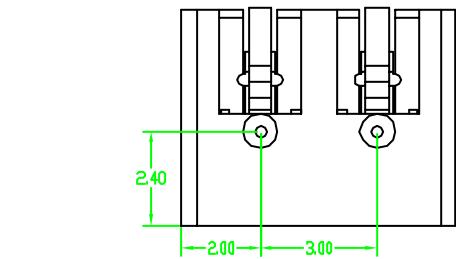

2PIN P.C.B. LAYOUT (TOP VIEW)

#### SPECIFICATION

Insulator : LCP(Black)  
Contact : Beryllium Copper  
Plating : Selected gold over nickel

#### STANDARD DATA

Rating current : 1.0A  
Operating temperature : -30 ~ +70  
Storage temperature : -40 ~ +85

#### ELECTRICAL

Insulator resistance : 1000M ohms Min. @ 250 VDC  
Withstanding voltage : 250VAC / minute  
Contact resistance : 50 m ohms Max.

DIMENSION IN mm [Inch]		C	廣茂股份有限公司 COMMA ELECTRONIC INC	CUSTOMER DRAWING
TOLERANCE UNLESS OTHERWISE SPECIFIED		名稱 TITLE	BATTERY CONNECTOR	
.X±0.3	X.± 1°	審核 APPROVE		
.XX±0.20	.X± 0.5°	核對 CHECK	案號 FILE NO. BCS3.0	DWG NO. BCS3.0-1102
.XXX±0.100	.XX± 0.25°	製圖 DRAW	圖紙 SIZE A4	角法 PROJ. 日期 DATE 11/03/99 比例 SCALE 1:1 更改 REV A

F

A

A

1 2 3 4 5 6 7 8