
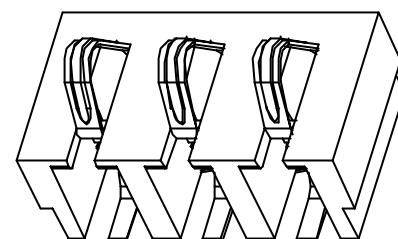



1 2 3 4 5 6 7 8

F



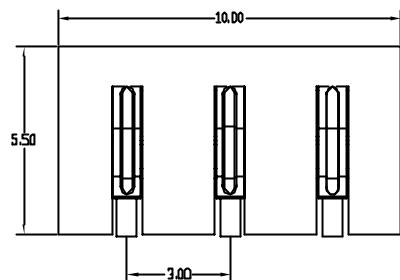


更改 REV	設變內容 MODIFICATION	日期 DATE	修改 DRAW

F



3PIN P.C.B. LAYOUT (TOP VIEW)

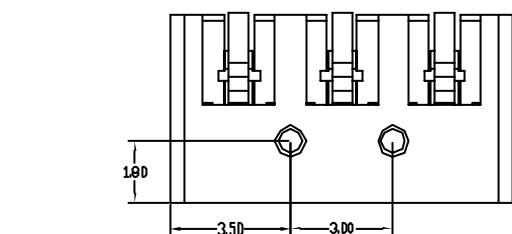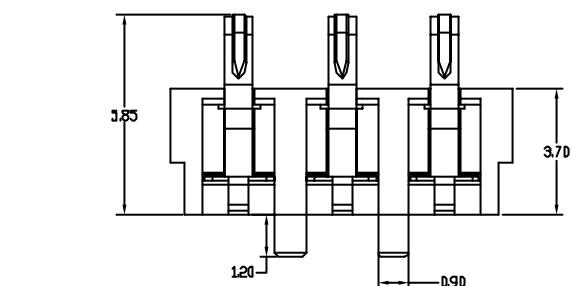

SPECIFICATION

Insulator : LCP(Black)
Contact : Beryllium Copper
Plating : Selected gold over nickel

STANDARD DATA

Rating current : 1.0A
Operating temperature : -30 ~ +70
Storage temperature : -40 ~ +85

ELECTRICAL

Insulator resistance : 1000M ohms Min. @ 250 VDC
Withstanding voltage : 250VAC / minute
Contact resistance : 50 m ohms Max.

DIMENSION IN mm [inch]		C	康茂股份有限公司 COMMA ELECTRONIC INC.	
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE	BATTERY CONNECTOR
.X±0.3	X.± 1°	審核 APPROVE	案號 FILE NO.	BCS3.0
.XX±0.20	.X± 0.5°	核對 CHECK	圖號 DWG NO.	BCS3.0-1103
.XXX±0.100	.XX± 0.25°	製圖 DRAW	圖紙 SIZE	A4
			角法 PROJ.	日期 DATE 12/22/04
			比例 SCALE	更改 REV XA

1

2

3

4

5

6

7

8

F

E

D

C

B

A