

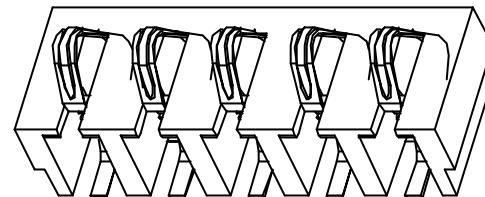
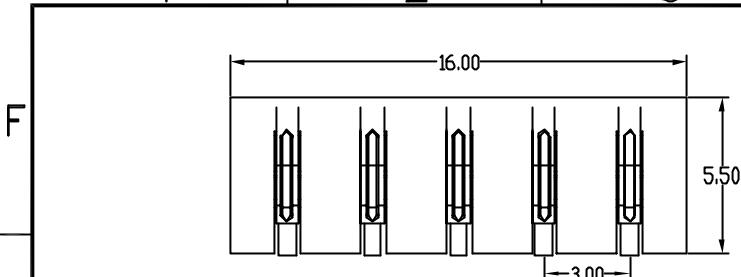
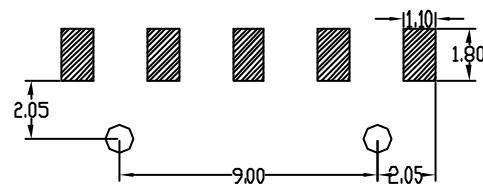
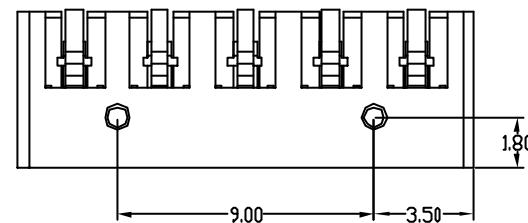


1 2 3 4 5 6 7 8

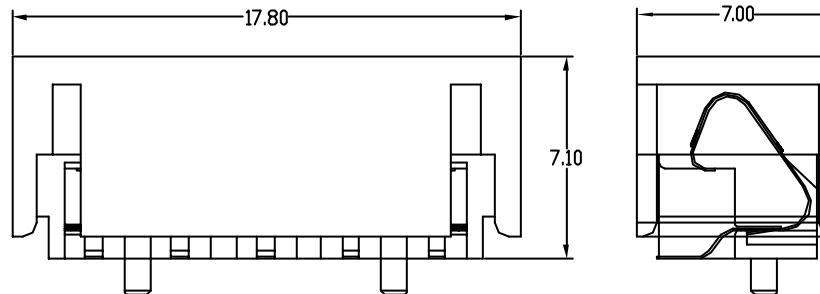

更改 REV	設變內容 MODIFICATION	日期 DATE	修改 DRAW
-----------	----------------------	------------	------------

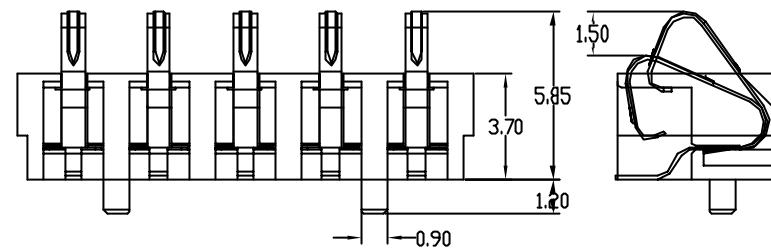

5PIN P.C.B. LAYOUT (TOP VIEW)

#### SPECIFICATION

Insulator : LCP(Black)  
Contact : Beryllium Copper  
Plating : Selected gold over nickel

#### STANDARD DATA

Rating current : 2.5A  
Operating temperature : -30 ~ +70  
Storage temperature : -40 ~ +85

#### ELECTRICAL

Insulator resistance : 1000M ohms Min. @ 250 VDC  
Withstanding voltage : 250VAC / minute  
Contact resistance : 50 m ohms Max.

DIMENSION IN mm [Inch]			C	廣茂股份有限公司 COMMA ELECTRONIC INC.
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE	BATTERY CONNECTOR
.X±0.3	X.± 1°	審核 APPROVE	案號 FILE NO.	BCS3.0
.XX±0.20	X.± 0.5°	核對 CHECK	圖號 DWG NO.	BCS3.0-1105
.XXX±0.100	XX± 0.25°	製圖 DRAW	圖紙 SIZE	A4
			角法 PROJ.	日期 DATE 12/02/05
			比例 SCALE	1:1
			更改 REV	XA

1 2 3 4 5 6 7 8