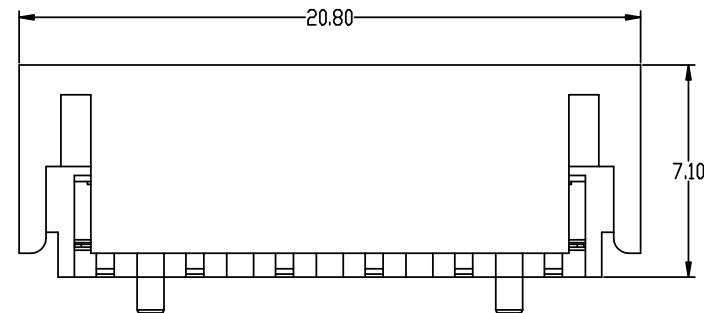

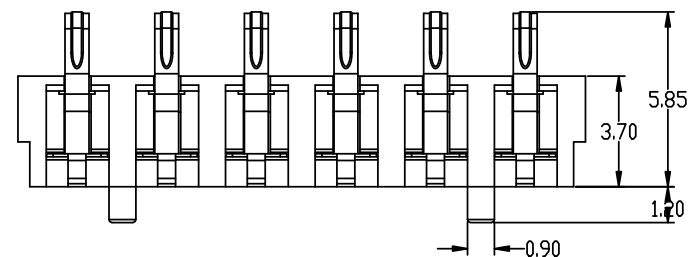
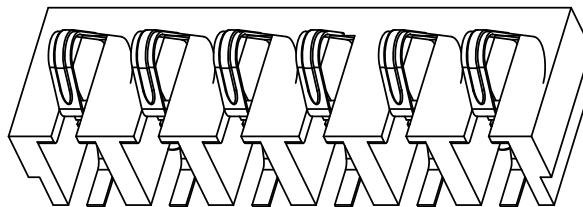
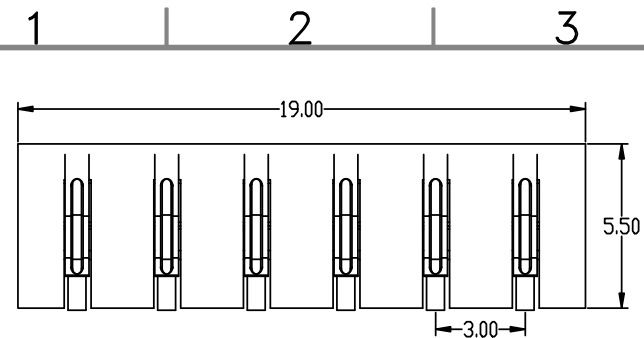


6PIN P.C.B. LAYOUT (TOP VIEW)

SPECIFICATIONS:

- 1.Contact Current Rating:1.5 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-55° to +125°C.
- 6.Material:

Ccontact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Cover Housing: LCP.
Bottom Housing: LCP.

DIMENSION IN mm [Inch]			C	
TOLERANCE UNLESS OTHERWISE SPECIFIED			康茂股份有限公司 COMMA ELECTRONIC INC.	
.X±0.3	X*±1°	審核 APPROVE	名稱 TITLE	Battery Connector Pitch 3mm 6Pin Height 3.7mm
.XX±0.20	.X*±0.5°	核對 CHECK	案號 FILE NO.	BCS3.0-1106
.XXX±0.100	.XX*±0.25°	製圖 DRAW	圖號 DWG NO.	BCS3.0-1106
圖紙 SIZE		A4	角法 PROJ.	日期 DATE
比例 SCALE		1:1	更改 REV	12/02/05 XA

更改 REV	設變內容 MODIFICATION	日期 DATE	修改 DRAW

CUSTOMER DRAWING