

REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Released		06/10/2010	Hyde
B	Add Packing Option Δ B X1	EC1007024	07/09/2010	Hyde

- Notes: 1. Material :
Housing : Thermoplastic, UL 94V-0
Terminal : Copper Alloy
2. Finish :
Terminal : Selected Gold on Contact Area, 1u" Min. Gold on Solder Tails, Both over 50u" Min. Ni Under-plated Overall

3. Order Information :
SBT0-010 X 2-00 X X A

Amount of Pins
3 : 3 Pins
2 : 2
9 : 9 Pins
A : 10 Pins
2 : 2
B : 11 Pins

Δ Packing :

T: Tube



1: Tube + Kapton

2: Reel + Kapton

Plating


2 : 2u" Min. Gold on Contact Area

3 : 5u" Min. Gold on Contact Area

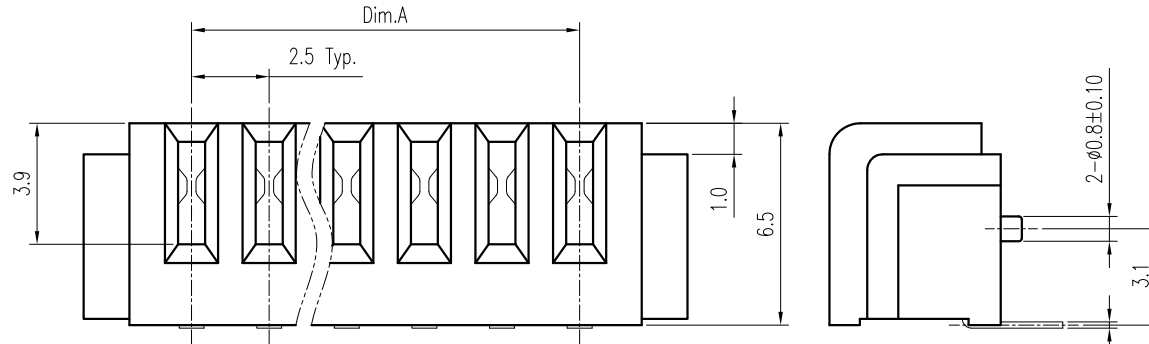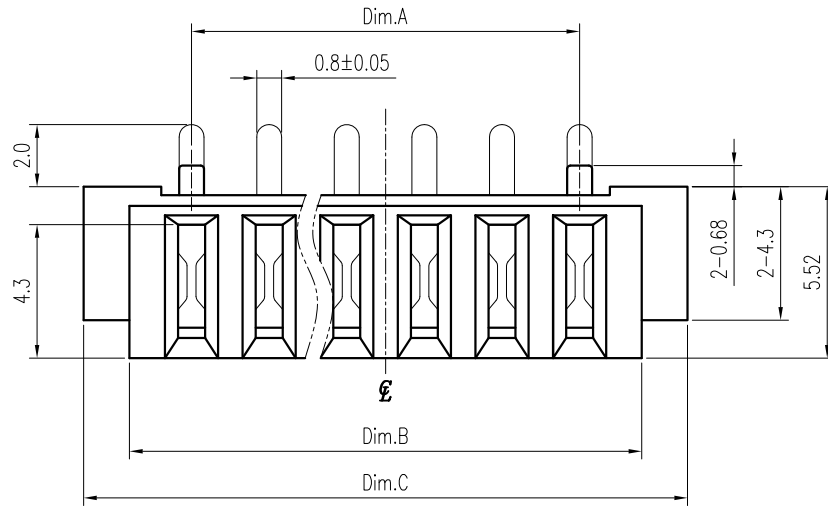


Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C
SBT0-01032-00XXA	3	5.0	9.0	11.95	
SBT0-01042-00XXA	4	7.5	11.5	14.45	
SBT0-01052-00XXA	5	10.0	14.0	16.95	
SBT0-01062-00XXA	6	12.5	16.5	19.45	
SBT0-01072-00XXA	7	15.0	19.0	21.95	
SBT0-01082-00XXA	8	17.5	21.5	24.45	
SBT0-01092-00XXA	9	20.0	24.0	26.95	
SBT0-010A2-00XXA	10	22.5	26.5	29.45	
SBT0-010B2-00XXA	11	25.0	29.0	31.95	

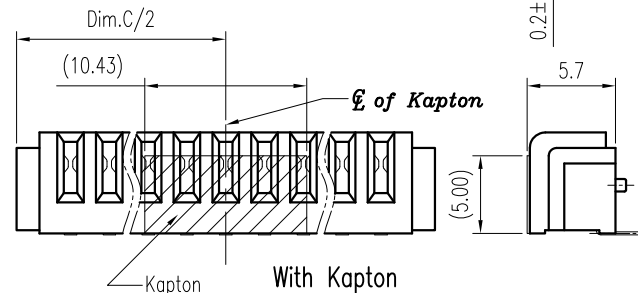

With Kapton
Scale 8:1

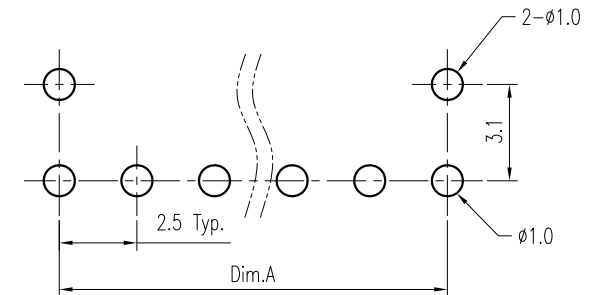

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

DIMENSION IN mm [inch]			
Tolerance unless otherwise specified			
X.	± 0.38	X.*	$\pm 10^*$
X.X	± 0.25	X.X*	$\pm 5^*$
X.XX	± 0.20	X.XX*	$\pm 2^*$
X.XXX	$\pm$	X.XXX*	$\pm$



CUSTOMER DRAWING

Approver:

Checker:


Title 2.5mm Pitch Battery Conn.
Female Type

Dwg No. SBT0-010X2-00XXA

File No. N/A

Drawer: Hyde

07/09/2010



Scale: 4 : 1

Size: A 4

Rev : B

Sheet: 1 / 1