
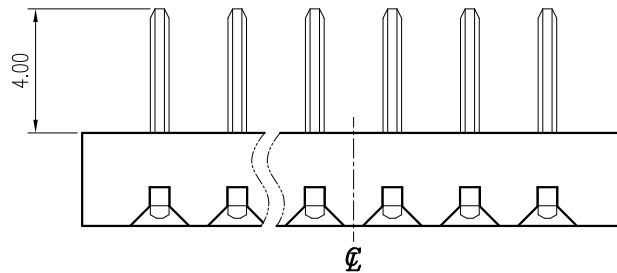
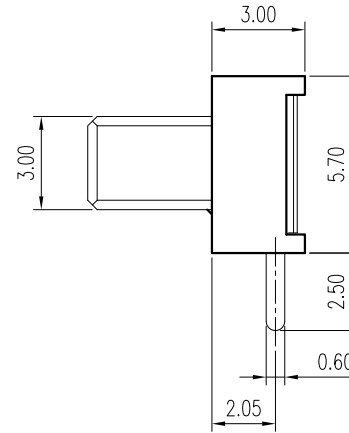


REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		06/19/2008	Aaron

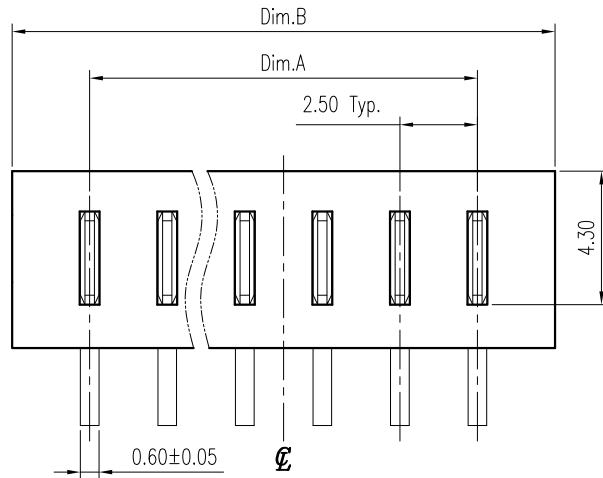

Notes:

- Material :
Housing : Thermoplastic UL 94V-0 , Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 50u" Min. Ni Under-plated Overall

3. Order Information :

SBT1 -080 X 3-06T X
T : RoHS(for High Temperature)

Amount of Pins


4 : 4 Pins
5
9 : 9 Pins
A : 10 Pins

Plating

2 : 2u" Min. Gold on Contact Area
3 : 5u" Min. Gold on Contact Area

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
SBT1-08043-06TX	4		7.50	12.50
SBT1-08053-06TX	5		10.00	15.00
SBT1-08063-06TX	6		12.50	17.50
SBT1-08073-06TX	7		15.00	20.00
SBT1-08083-06TX	8		17.50	22.50
SBT1-08093-06TX	9		20.00	25.00
SBT1-080A3-06TX	10		22.50	27.50

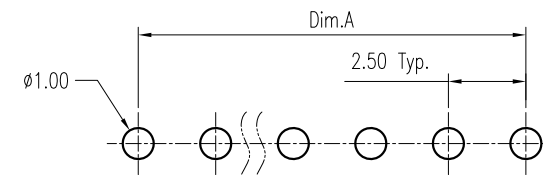

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

DIMENSION IN mm [inch]			
Tolerance unless otherwise specified			
X.	± 0.38	X.*	$\pm 10'$
X.X	± 0.38	X.X*	$\pm 5'$
X.XX	± 0.25	X.XX*	$\pm 2'$
X.XXX	± 0.13	X.XXX*	$\pm$



CUSTOMER DRAWING

Approver:

Checker:


Title 2.5mm Pitch Battery Conn.
Male Type

Dwg No. SBT1-080X3-06TX

File No. N/A

Drawer: Aaron

06/19/2008



Scale: 4 : 1

Size: A 4

Rev : A

Sheet: 1 / 1

WC00-4B